

PID-Robo

PID ROBO is a white PET label which perform well on a wide range of non-metallic objects including plastic or corrugated cardboard cases & glass surfaces, making it ideal for deployment across a multitude of industrial applications.

The robust Antenna Design of ROBO label ensure that it perform well even when applied in proximity of high dielectric constant materials or high moisture content items like fruits, vegetables, fish and even human body.



Applications



Asset
Tracking



Retail
Applications



Warehouse
Management



Race Timing

Electrical Specifications

Operational Frequency	FCC: 902-928MHz ETSI: 865- 868 MHz
Interface Protocol	ISO 18000-63 and EPCglobal Gen2v2
Chip Type*	IMPINJ MONZA R6-P
Memory Configuration	EPC Memory - 96 / 128 bits USER Memory - 64 /32 bits
Date Retention	50 Years
Write Cycle Endurance	100,000 cycles
Read Range**	Free Air- 12-13 m(ETSI), 14-15 m(FCC) On Glass-14-15 m (ETSI), 12-13 m(FCC) On Plastic- 14-15 m(ETSI), 13-14 m(FCC) On Cardboard- 14-15 m(ETSI), 13-14 m(FCC)
Applicable Surface	Non- Metallic Surfaces

Delivery Format

Packaging	Roll
Core Inner Diameter	76mm
Roll Outer Diameter (Max.)	200mm
Unwinding Direction	Label on outside of roll
Standard Roll Size	1500Pcs
Standard Web Pitch	30.30mm

Personalization

- Customer specific encoding of EPC
- Customised printing of logo, text, barcode etc

Products Characteristics

Label Size	92.5 X 26.5mm/3.64X 1.04in
Antenna Size	90.0X 24.0mm/3.54X 0.94 in
Antenna Material	Aluminium
Face Material	White TT Printable Polyester
Adhesive	General Purpose permanent adhesive
Weight	0.75g
Final Inspection	100% tested, defective tags are marked


Environmental Specifications

Operating Temperature	-20°C/ + 70°C (-4°F / +158°F)
Ideal Storage Condition	+23°C / 50% RH
Expected Lifetime	Years in normal operating conditions
Water Resistance	IP67

IC Option

IMPINJ Monza R6P	EPC Memory - 96 / 128 bits USER Memory - 64 /32 bits
IMPINJ Monza M730 / M750	EPC Memory - 128 bits / 96 bits USER Memory - 0 /32 bits
NXP Ucode 9	EPC Memory - 96 bits

READ RANGE GRAPH

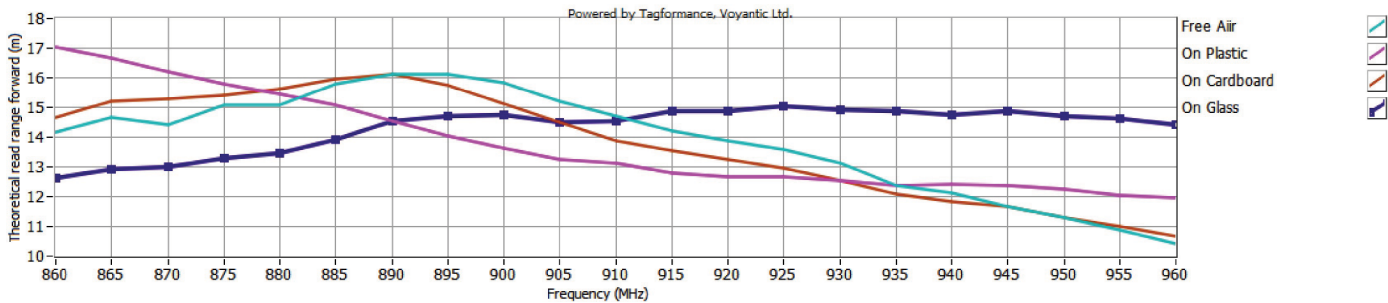

** The indicated read range values are measured in our laboratory testing environment, where antennas with optimum directivity are used with maximum allowed operating power. Different surface materials and environments may exhibit different results.