

Electrical Specifications

Operational Frequency	FCC: 902-928MHz ETSI: 865- 868 MHz
Interface Protocol	ISO 18000-63 and EPCglobal Gen2v2
Chip Type*	Impinj Monza M730/M750
Memory Configuration	EPC Memory - 128 bits / 96 bits USER Memory - 0 /32 bits
Date Retention	50 Years
Write Cycle Endurance	100,000 cycles
Read Range**	upto 10.5 Meter


Products Characteristics

Die Cut Size	46.0 X 20.0 mm / 1.81 X 0.78 in
Final Inspection	100 % Tested
Material	PET/Aluminum Foil
Packaging	Reel core inner dimension: 76.2mm/ 3", 5000pcs/roll
Attachment	Adhesive

Environmental Specifications

Operating Temperature	-40 to +85 °C
Storage Temperature	-40 to +85 °C
IP Rating	IP67


Drawing of Product

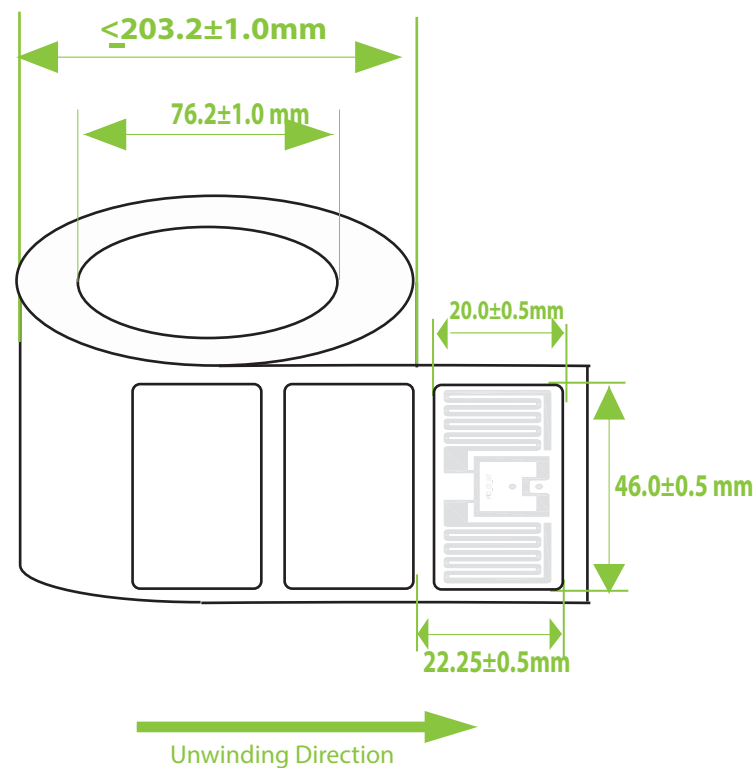

Personalization

- Customer specific encoding of EPC
- Customised printing of logo, text, barcode etc

READ RANGE GRAPH

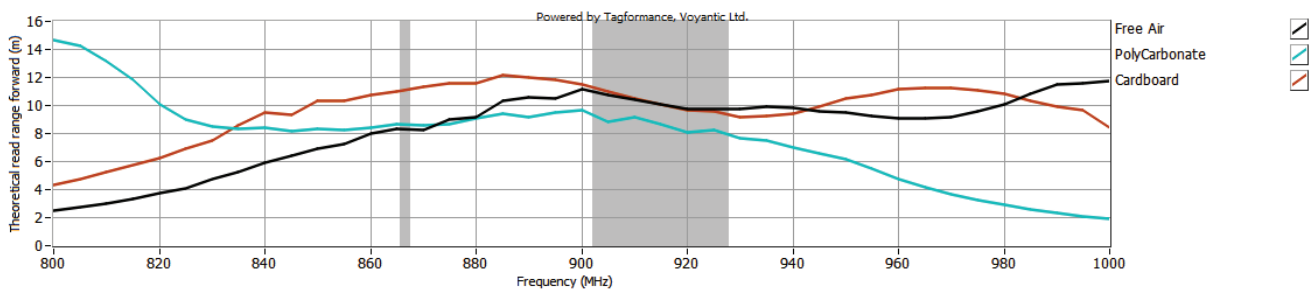

** The indicated read range values are measured in our laboratory testing environment, where antennas with optimum directivity are used with maximum allowed operating power. Different surface materials and environments may exhibit different results.